


VFK-300




Active chilled beam



Product description

Active chilled beam, KOOLAIR brand, model **VFK-300**, length from 600 to 3000, width 300 mm and height 200 mm, integrated in the false ceiling or plasterboard. It incorporates 2 linear lateral side slot diffusers. For horizontal supply with Coanda effect of the mixed air flow (primary and secondary air). Hinged perforate plate face, available in different patterns to access the battery and get it cleaned. The unit is equipped internally with nozzles (size P/M/G) on both sides of the primary plenum box, incorporating as an option nozzle control system. Hot or chilled water (two-pipe installation), or hot and chilled water (four pipe installation) coil copper tubes and Aluminum fins and water connection dia 1/2". One or two air connections (front/side or top), Dia-124mm. **VFK-300** is provided with hanging brackets to easy its installation. Standard finish Ral 9010, other finish available upon request. Optionally VFK-300 can be equipped with control valve / balancing and dew point sensor. See website www.koolair.com & Komfortair-Water program for technical data.

General dimensions

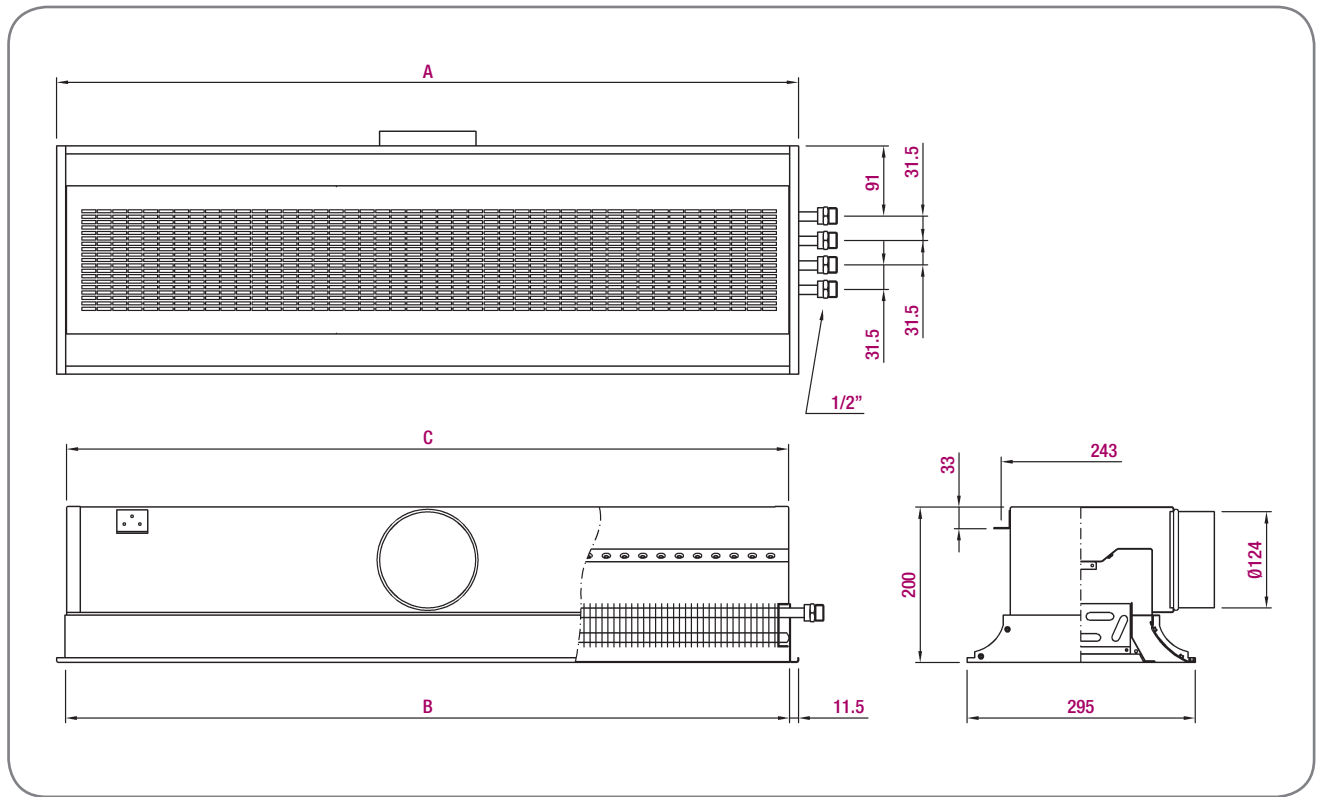

Size	A	B	C
900	895	872	874
1200	1195	1172	1174
1500	1495	1472	1474
1800	1795	1772	1774
2100	2095	2072	2074
2400	2395	2372	2374
2700	2695	2672	2674
3000	2995	2972	2974

Unit mm

