GLOBAL LP

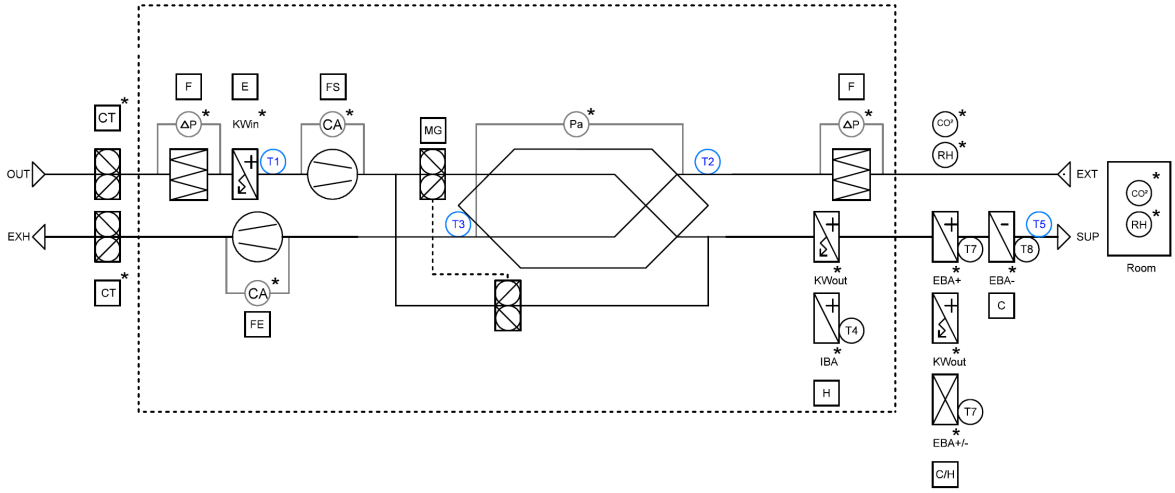

Component / Delivery

FE	Exhaust fan with EC drive			installed / wired / configured
FS	Supply fan with EC drive			installed / wired / configured
CT*	Motorised damper CT			separately
H*	Heating			
	KWin* : Electrical coil "frost protection"			installed / wired / configured
	KWout* : Electrical post-heating coil			installed / wired / configured
	IBA* : Internal Water Heating coil			installed / wired / configured
	3-way valve, Valve actuator			separately
F	Filter OUT ePM1 50% (F7) / EXT ePM10 50% (M5)			installed
C/H*	Heating / Cooling			
	IBA+* : Heating coil			separately
	KW* : Electric heating			separately
	EBA+/- *: Change over coil			separately
C*	Cooling EBA-* : Cooling coil			separately
T1	Outdoor temp.	T3	Exhaust temp.	installed / wired / configured
T2	Extract temp.	T5	Supply temp. (separately)	installed / wired / configured
T4	Frost protection temp.			installed / wired / configured
T7	Frost protection temp.			separately
T8	Frost protection temp.			separately
CO²* RH*	Sensors CO², Humidity			separately
CA*	Constant airflow kit			installed / wired / configured
ΔP*	Pressure switch			separately
Pa*	Pressure sensor			installed / wired / configured

*: Option

Changes			Name	Date
Name	Date	Draw.:	Beckers	10.10.2018
		check.:	Pary	
		Norm:		
Subject:	GLOBAL_Fow chart_EN.spl7			GLOBAL LP

T 0320 - 28 61 81 | **www.auerhaan-klimaattechniek.nl**
Als het om lucht gaat.
AUERHAAN KLIMAATTECHNIEK